

# Technical data sheet

<b>Title</b>	Weldable tensioner
<b>Standard</b>	DIN 1480

## 1.- Purpose and field of application.


Cable tensioner comprising straight ends, made from forged steel with zinc electroplating.

One of the elements will be threaded on the left and the other on the right. The tensioners will have the metric marked and an "L" if they turn to the left.

The accessory will provide tension by rotating the body of the tensioner until the desired tension is reached.

It is always advisable for the tensioner to work in a straight line or under traction to ensure correct operation.

## 2. Product dimensions and WLL loads

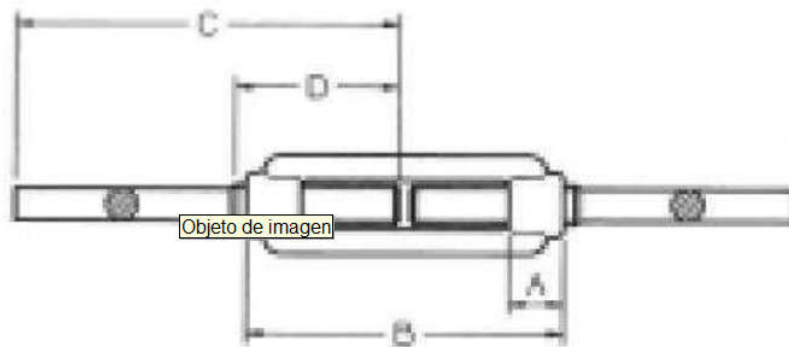

M	A	B	D	C	WLL
M6	12	110	60	120	285
M8	15	110	65	120	320
M10	18	125	75	150	600
M12	21	125	75	150	665
M14	24	140	90	165	865
M16	27	170	100	200	1665
M20	34	200	120	220	2200
M22	36	220	120	220	3335
M24	39	255	150	260	3665
M30	45	255	160	260	7335